


Fluid Mechanics
Prof. Subashisa Dutta
Department of Civil Engineering
Indian Institute of Technology-Guwahati

Lecture - 06
Buoyancy, Metacentre, Stability and Rigid Body Motion

Welcome you to the lecture six on fluid mechanics. In the last class we discussed about fluid statics that means fluid at the rest. And again, I want to repeat it that I have been following these three reference books. One is Cengel Cimbala, Fluid Mechanics Fundamentals and the Applications; they very concise book on Frank M. White that is the Fluid Mechanics; and the Fluid Mechanics by Bidya Sagar Panis.

(Refer Slide Time: 01:11)

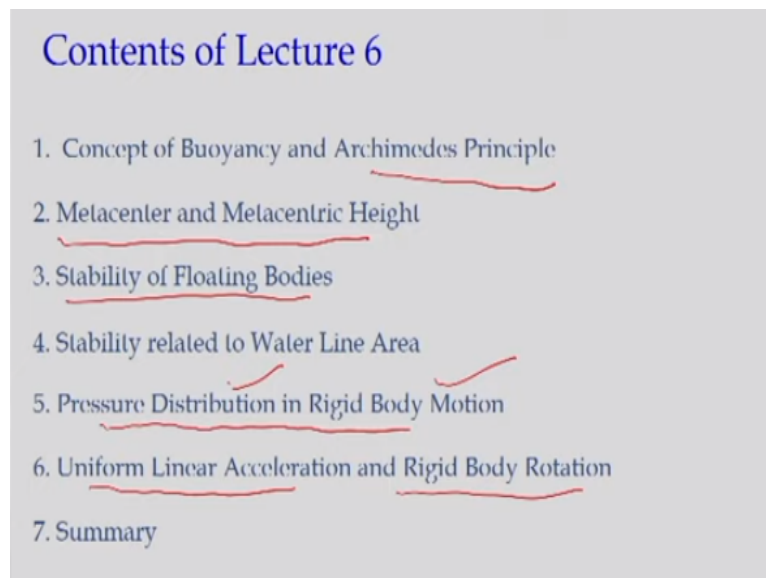


Contents of Lecture 6

1. Concept of Buoyancy and Archimedes Principle
2. Metacenter and Metacentric Height
3. Stability of Floating Bodies
4. Stability related to Water Line Area
5. Pressure Distribution in Rigid Body Motion
6. Uniform Linear Acceleration and Rigid Body Rotation
7. Summary

Now let us go to the next levels. We will discuss today the concept of the buoyancy, very well known Archimedes principles. In that we will also discuss it the metacenter or metacentric height how to determine the metacentric height of a floating object. And we also will talk about the stability of the floating object. And then we will talk about if there is a rigid body motions, the liquids in a rigid body motions.

What could be the pressure diagrams and also we will discuss is that rigid body motions when you have a uniform angular rotations.

(Refer Slide Time: 02:04)

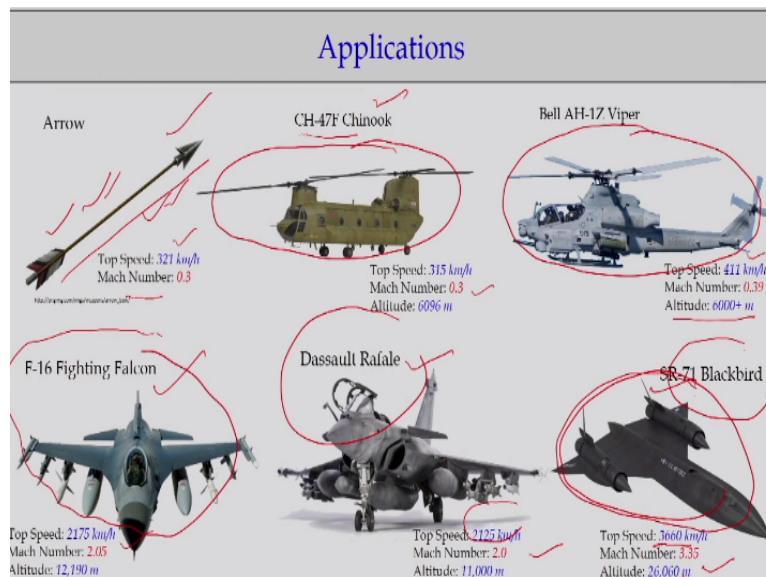

With this, let us start the lectures today. Before starting these lectures, let us see these slides. This is what is showing that how the fluid mechanics has changed our life. If you look at this arrow which is maybe very ancient times first the human civilization, starting the hunting. Hunting is a main occupation for the life. That is what having a top speed of 321 kilometer per hour and as equivalent to Mach number of 0.3.

So the art or knowledge of aerodynamics of what I would to say it that these the arrow or the aerodynamics of the arrows, that is what was known to very ancient people, just what they use for the hunting and the design of the arrows had changes as realized with the time, that different type of speed, different type of velocity, different type of range that is what is design.

And most of these designs which is done it from the experience. But what it happened maybe last one century we have developed fighter planes and that is what if we can look at the figures like the CH-47F Chinook with the top speed is 315 km/h which will have a Mach number of 0.3. So if you look it the arrangement of this, the aircraft.

Also you can see this arrangement of the aircraft and they are wings to create a vortex and because of creating the vortex that what will be difference the pressures and that will be resulting a off fleet force. And the drag and the off fleet force that what will give it two different vehicle this the difference vehicles which is having Mach numbers of 0.39, and it can go up to altitudes of 6000 meters and top speed is 411 kilometer per hours.

The similar way if you look at the newer flights what is the space flight or planes are available like the F-16, Rafales or the Blackbird. If you look at their speeds 2000 km/h and their Mach numbers is more than 2. And basically this Blackbird is having the top speed is close up to 3660 km/h and this altitudes can go up to 26,000. How this technology is developed so fastly to go to a Blackbird level because of the knowledge of fluid mechanics.

Not only the analytical fluid mechanics, the but also its develop[in terms of numerical methods, the computational fluid dynamics, as well as the full scale the wind tunnel facility. The most of these advanced fighter planes are tested in full scale wind tunnel facilities.

So that is what my point to say it, if you look at the knowledge of the fluid mechanics can help us to design fighter aircraft, which can go as fast as 3600 km/h with a altitudes of 26,000 and which is the Mach numbers 3.35. So this what it is a possible because of the knowledge of the fluid mechanics.

So because of the extensive experiment conducting in full scale wind tunnels, series of numerical testing conducting for this type of the aircraft, it is now possible to develop this type of aircraft and not having any failure of this type of things. So what I am to emphasize is that the fluid mechanics knowledge is not limited to a text book of solving few academic problems. But we should have a more knowledge.

We should understand the fluid mechanics process more details as we are developing our fluid mechanics which are there more analytical way. Now the full scale wind tunnel facilities, the numerical methods CFD advancement of CFD made us to look the fluid mechanics in different way. So that is what my objective to say that fluid mechanics is now is a integral part to develop our the aircraft systems what I have just given you the examples.

(Refer Slide Time: 07:15)

Hydrostatic Forces on Curved Surfaces

- The resultant pressure force on a curved surface is computed by separating it into horizontal and vertical components.
- The horizontal component of force on a curved surface equals the force on the plane area formed by the projection of the curved surface onto a vertical plane normal to the component.

$$F_V = W_1 + W_2 + W_{air}$$

reflected

- The vertical component of pressure force on a curved surface equals in magnitude and direction the weight of the entire column on fluid, both liquid and atmosphere above the curved surface.

Let us come back to the topics what we have been discussing that fluid at the rest okay. As I told it when the fluid is the rest we have the two force component. One is force due to the pressure and the second is the gravity force. There is no velocity components, there is no shear stress component. So that is the reasons if you take a control volumes, it is easy to draw the pressure diagrams and from that pressure diagrams, if you equate with the gravity force, you can solve the problems.

That is a very basic concept what we have used in fluid at the rest. So now if you look it if you have a to determine what could be the forces on a curved surface? What the problems we face it. If you have a let me take this example. So you have the free surface and you have a curved surface and you have the liquid which is having the density let be the rho, density is let be the rho.

If it that conditions, what is the basic difference of this point is here that if you take any point as you know it the pressure is a scalar quantity and will have a the pressure component will be normal to the point where you were considering the surface. In that case, what it happens when you have a curved surface, the directions of the pressure that what changes from the point to point.

So because of that, we have to resolve this force component in three Cartesian coordinate x, y, z. Then we can take a small element, do the integrations over the surface because you know the pressure diagrams, then we can integrate it to solve get

it what could be the force, because of this pressures and the weight of the fluid. That what can be done it.

The problems comes it that we can simplify that ones like we can resolve the curved surface into a two part horizontal and vertical components okay. Like here what the diagrams have shown it, it is a curved surfaces and that is a projected surface on the verticals and on that the horizontal force is acting it and verticals are in the downward directions.

If it that the component if I draw the free body diagram, it will become like this. That means there will be the free surface and the top of the free surface there will be weight due to the air. Then there will be weight above this curved surface W_1 and W_2 . That is a weight of the liquid what is we have. Now if I draw this is my control volume and the pressure diagrams okay.

This is what my control volume and if I draw the pressure diagrams, I can draw the pressure diagrams, which will be the triangular shape. The linearly will increase this at z we go further down and down. So that way we will have the pressure diagram like this. So you can see that if you look it the point above the CV, the same pressure diagram in the both the side which is representing force F_1 , F_1 here.

That means, these two force will be cancelled out when we take this total pressure diagram to find out what could be the force due to these pressures. So F_1 F_2 will be cancelled out. Only you will have the pressure component which will be the trapezoidal pressure component from this C point to the this point. So in horizontal directions we will have the pressure that is what only the pressure diagrams will change over this curved surface will be a trapezoidal set.

So if this is the pressure diagrams, you know from the height, we can determine what is the pressure at the sea, what is the pressure this point. If I know it, the area of this triangles will show us what will be the force F_H acting over that multiply with the area, we can get it what will be the pressure force is acting in the horizontal direction. In vertical direction, if we see these diagrams, the basically the weight of the liquid what will become as a vertical component.

That is what will be the W_1 , W_2 , and W_{air} . That will be the F_v will be the balance by the weight of the liquid what we have and W_{air} can be neglected as compared to the W_1 and W_2 . So it is very easy to compute the vertical component pressure force on curve equal to magnitude and direction of weight of the entire column on fluid both liquid and atmospheres above the curved surface. That what we have said that.

And what will be the horizontal force component that what will be force on the plane area that what is a projection of the curved surface on to a vertical plane normal to this component. That what either through the pressure diagrams you can compute the force in the horizontal directions or you get it what could be the projected area on these the vertical plane and find out its centroid locations.

At that centroid locations if you know the pressure multiply with area that what will we give you the force component. Then you know the line of action of the force where it is acting it. For the weight part, the vertical component as well as horizontal component. If you know these two force component in vertical and horizontal direction and their line of actions you can easily using the vector calculus algebra, you can compute what will be the resultant forces and where is the line of actions of resultant forces.

So we will solve the some numerical problems to demonstrate that. But very basic idea is that whenever you have a curved surface, you draw a pressure diagrams. Consider a control volume, draw the pressure diagrams. Then equate the force component in horizontal directions and the vertical direction and those force component you find out from the pressure diagram and the weight of the liquids.

(Refer Slide Time: 14:10)

Buoyancy

- Why wooden objects float on water, but a small needle of iron sinks into water.
- a fluid exerts an upward force on a body which is immersed fully or partially in it. The upward force that tends to lift the body is called the *buoyant force*.

$$dF_B = (F_V(2) - F_V(1)) = (P_2 - P_1)dA_H$$

$$dF_B = w(Z_2 - Z_1)dA_H$$

- The total upward buoyant force becomes

$$F_B = \int w(Z_2 - Z_1)dA_H = w(\text{volume of the body})$$

Now let us come it to very interesting topics what is we use in buoyancy as you know it the famous scientist Archimedes what invented this buoyancy concept when he was in a bathtub experienced the lighter weight because of the buoyancy forces. So what is the buoyancy force if you look it that, it is a very simple things that whenever you have any object, okay submerged within a liquid, what will happen it that there will be a force from the top also force from the bottom.

There will be force from the top because of this, the liquid mass, the top of the liquid mass that force vertical force will come it. And there will be force will be upward direction. How much that will come it. If you look it that, if take a control volumes like this, you have the surface where P 1 pressure is coming at the top, the P 2 pressure is coming to here.

And the distance between that these two point if we define Z 1 by Z 2 then you can find out pressure at the P 2 is a is equal to the height and the rho g. Similar way the pressure at this point rho g and the height from the free surface. So if you subtract the pressure multiplied with the delta A, you can find out it will be the force component what will come it which is equivalent to weight of this element as equivalent to weight of liquid displaced by that control volume.

That means these control volume what you have chosen it if you consider of submerged body that is as equal to the liquid that is that. That is what display the water, liquid because of the submergence of this object that what will be the vertical

force what will get it, what will we experience it. So we will have a weight of the fluid. That is what is the unit weight and the volumes.

The unit weight and the volume that what is surface area and the vertical height difference what we have. If you look at this total upward buoyant forces, if as I take in the element, if I do the integrations, finally we will get it unit weight of the liquid where we submerge the body and the volume of the body. That is what will be the buoyant force and what acts in upward directions, so that is what is a total upward buoyant force that what it works.

(Refer Slide Time: 17:08)

Center of Buoyancy

- The line of action of the buoyant force on the object is called the center of buoyancy.
- The centroid of the displaced volume of fluid is the centre of buoyancy.
- Which, is applicable for both submerged and floating objects.

Archimedes principle

"A body immersed in a fluid experiences a vertical buoyant force which is equal to the weight of the fluid displaced by the body and the buoyant force acts upward through the centroid of the displaced volume".

The floating body displaces its own weight in the fluid in which it floats.

$$(F_B)_{LF} = \sum \rho_i g (\text{displaced volume})_i \quad F_B = (w) (\text{displaced volume}) = \text{floating} - \text{body weight}$$

LF = layered fluid

Now if you look it another point is we also look it that the center of buoyancy. That means the line of actions of the buoyant force like we try to compute for the other force component. So line of actions of the buoyant force is the center of buoyancy. That means at which point the buoyancy force acts. That is what the center of buoyancy.

That is what is necessary to counter with a gravity weight of the floating object. Like for example, if you look at the very interesting photographs what we have shown it here a swimmer, okay? You can see that the CG with the weight of the body is there, okay the center of gravity points and the CG weight of the body and the whatever the liquid displayed by this swimmer that what having a point here the center of buoyancy.

And at that center the buoyancy force is working like this. If you looking this figure you can say that there will be torque or moment will be because of these force in balance, okay. So that is the reasons if you look at any swimmers, they try to do some swimming activities to remain as a floating conditions. Because these the center of buoyancy and the CG they do not lie in the same locations.

Because of that there will be a torque will be there and that torque to balance it any swimmer if you look it to remain it floating conditions does slight bit swimming activities that change the flow pattern such a way that the additional force you can generate it to counter balance this moment. So very interesting studies like this if you look it that the basically the center of buoyancy if you look it that, that should be the centroid of displayed volume of the fluids.

So that is what to summarize and to make it very easy to say that the Archimedes principles what it says that a body immersed in a fluid experience a vertical buoyant force. That means whenever you immerse a body in a fluid, you will have a vertical buoyant force will act it which will be equal to weight of the fluid displaced by the body and the buoyant force act upward through the centroid of the displaced volume, which we discussed it.

Same thing is written in very concise way. That is what the Archimedes principle, okay. So is way back in two or three BC, okay. That is the knowledge of the fluid mechanics as old as just starting of the civilization. So if you look it that way, so we can say that the floating body displace the own weight. In case of the floating body what will happen it is that it can totally submerge in the floating body.


The floating body case, the weight of the object is counterbalanced by the buoyant force. So that what is happened. The buoyant force is counterbalanced by the weight of the object. So that is what it happens it, the floating and the body weight that what both will counterbalance it. But some of the case you can have a layered fluid.

That means you can have a different type of the fluids will be there with a different density like ρ_1 , ρ_2 , ρ_3 and if you have a object is floating interface between two density the same concept we can consider it but you have to consider the pressure

diagrams, you can find out which part of the volume is displayed by which liquid and based on that, you can have understand the problems will be the different as compared to single liquid concept where the rho a single unit rho value is there.

That is what is quite easier as compared to the layer fluids. Now let us discuss about the stability of floating object, stability of floating objects like the ship.

(Refer Slide Time: 21:33)

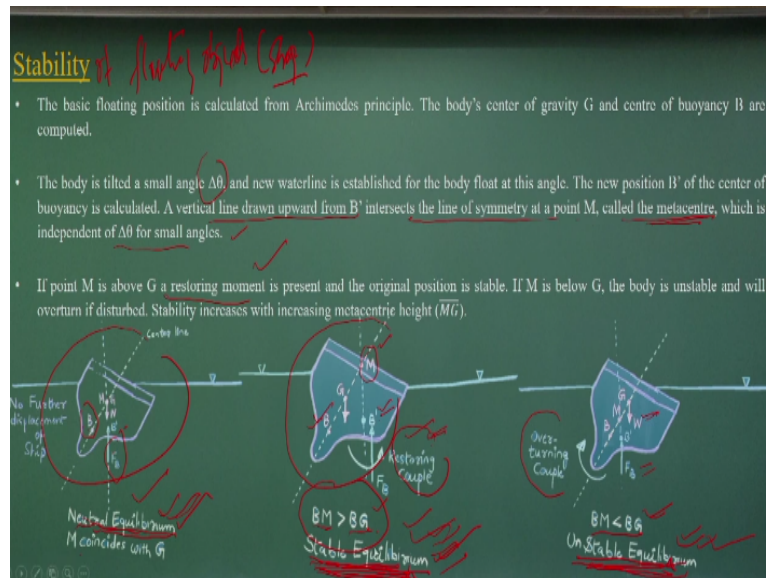

How much stability we have a floating objects. Now let us understand the principles the how the concept is conceived. As we discussed that there will be a gravity force which will act the CG of the floating object and there will be the force which is a buoyant force will act as the CG of the displaced liquid that what will be the center of buoyancy. So these two force components act at two different location.

One is a CG of floating object, another is a CG of the displaced volume of the fluid. Because of that, we will have the stability problems that if I just do a small disturbance or just slightly rotate the floating object, then what it happens it? Does that come back to original positions. If it is come back to original conditions, then I will tell it, it is a stable, it has a stability.

It can come back any small change will not change the stability of the floating object, it will come back to original position. But other way and others if I talk about unsteady unstable equilibrium. That means, if there is this slight bit change, slight bit

tilting the floating objects and that what generate a large torque and finally capsized then we will tell it is the unstable equilibrium.

So let me discuss about this three equilibrium concepts. Natural equilibrium, stable equilibrium, and unstable equilibrium. So you can understand it if somebody wants to design a ship he has to find out the ship should have stable equilibrium conditions. So any point of the ship that should follow a stable equilibrium, any disturbances regarding that, that should not capsize, they cannot have a overturning moment to capsize that.

Instead of that it can come to a stable locations, comes to the stable locations. So that is the reasons there are lot of detailed studies there in the people who are designed the ships. But here we will talk about very basic things that how we can find out the stability of a floating object and the stable in a three ways we define natural equilibrium, stable equilibrium, and unstable equilibrium.

Before doing that, let me introduce one point, which is we call the metacenters, okay. That is what is called the metacenter. What is that metacenters, okay? If I tilt it, a floating object to a angle of δ theta, then there will be a new waterlines will come it. That means the shape will change it like the for example, for this case, the will tilting this part. So new waterlines will come it.

And because of that, the buoyancy, the center of buoyancy will change it from B to B dash. It will change from B to B dash and the along that you will have the buoyancy force what is going to act it. The center of buoyancy will change from B to B dash and along that locations we will have the buoyancy force will act it. If a very simple case which is theoretical case it does not happen in real ship design case.

Because if there is a conditions that the buoyant force and the weight they are acting on the same points, the buoyant force and if I extend the buoyant force, that what this line of the buoyant force is coincide with the CG of the floating object where the weight is acting it. Then that is the point we call metacenters.

That means a vertical line drawn upward by v intersect the line of symmetry at a point which is defined as a metacenter which is an independent theta angle for the small changes. So if a condition what you have that M coincides with G , that is what I say the very rare condition happens that the M and G will be the same point, the metacenter and the center of gravity in the same point then we call natural equilibrium okay.

That means if you tilt it that again this will remain in that shape okay. That will be a natural equilibrium condition okay. But many of the cases what it happens is like this called a stable equilibrium. Like we tilted this floating object. As we tilted this floating object, the B is shifted to B dash.

The center of buoyancy is shifted from B dash as the waterline changes the displaced water liquid that what is changes and their center of buoyancy changes from v to v DS and FB the buoyant force does not change much, does not change it because the same volume of liquid displaced by this object only the center of buoyancy changes from the B to B dash.

Because of that, if you find out the metacenter point, which is M here, and G is the CG point, so in this case, we have that BM is greater than BG . BM is greater than BG . That means the M lies above of the G points. At that time if you look it there will be a restoring moment will be generated, there will be a restoring moment will be generated to bring these the tilted object to the right position, the initial positions.

That is the reason restoring couple or moment will happen it that will bring back this floating object with a minor tilting again it can come back it. So since this is the process happens where BM is greater than BG and we call it stable equilibrium, we call stable equilibrium. That means this type of ships or any floating object, if you do a minor instability or minor angular moment after certain times, you will see that it again coming back to the initial conditions.

So that type of floating object we call it is at stable equilibrium. Other way round if you have a BM less than BG same concept, okay. Now B has changed to B dash, the

center of buoyancy has changed it, but the M lies in between B and G. But if you look in the moment what generate because of this, the weight and the v will be the overturning moment.

Because of that, this floating body will be capsized. It will be capsized. So in that case the theoretically BM the distance between the buoyancy and the metacentric height, metacenters that BM will be lesser than the BG and we have a unstable equilibrium. So let me summarize that, that when you have a floating object to test its stability, we generate a small disturbance of tilted with a small angle delta theta.

And find out because of that, how the center of buoyancy changes it. And that the line of actions of the buoyancy force of new locations, they meet with the vertical axis that is the location is called the metacenter. Thus the location of the metacenter with respect to the CG and the earlier buoyant centers that what will decide it whether it is a natural equilibrium, stable equilibrium, or unstable equilibrium.

(Refer Slide Time: 31:03)

Stability related to Waterline Area

- The Naval architects have developed the general stability concepts into a simple computation involving the area moment of inertial of the waterline area about the axis of tilt.

$$\bar{x}v_{aobde} = \int_{cdaea} xdv + \int_{cda} xdv - \int_{cda} xdv$$

$$\bar{x}v_{aobde} = 0 + \int_{obd} x(LdA) - \int_{cda} x(LdA)$$

$$\bar{x}v_{aobde} = 0 + \int_{obd} xL(x\tan\theta dx) - \int_{cda} xL(-x\tan\theta dx) = \tan\theta \int_{waterline} x^2 dA_{waterline} = I_o \tan\theta$$

$$\frac{\bar{x}}{\tan\theta} = \overline{MB} = \frac{I_o}{v_{submerged}} = \overline{MG} + \overline{GB} \quad \text{or} \quad \overline{MG} = \frac{I_o}{v_{sub}} - \overline{GB}$$

Now how to compute this the metacentric height? Let you have a floating object like this, okay? And you consider the unit width of this ones which is a perpendicular to this surface that is what unit width is there. So what we will do it let have the initial positions of waterlines goes through this C to D. So initially it was C to D and it was tilted okay.

Because of the tilting as I explained earlier the B changes to B_1 dash, B changes to B_1 dash, okay. The basic idea is to find out how we can establish a relationship between the metacentric height okay. So if you look it that the center of buoyancy changes from B to B dash. That is what is \bar{x} distance from this okay. And because of that, what it happens it this area will be exposed out of the liquid.

This is the area come into the liquid, come into the liquid surface. Now we want to compute it, what will be the \bar{x} . That what we can do in very simple way that we can take it, the area of the moment of inertia of waterline can be about axis of tilting, about the axis of tilting. That means, YY , if I take it, the force into distance that what is the moment.

But here I am just giving the volume, because the force will be the ρg and the volume. What will be the force, the weight of the fluid. That what will be the ρg into volume. Since the ρg is a constant. So we use just the volume expressions here to equate the moment, nothing else. That is what you have to understand it is a just taking a moment of the force. That is what it act because of this fluid displacement.

If you look it the first, the moment of this part, volume part we have considered $aOBde$ that means this part, okay? That is what will be the three components will be there. Because of this, this component will be the minus, this component will be positive. That is what is happened. $cOBd$ will be the positive and this way. Since this is the axis of symmetry, these values becomes zero.

So you have just the volume moment what you have considered the force moment what you have considered for the OBd OBd and cOa . Now we can resolve what is l . The l will be the x sorry, the what will be the dA . You take a small element dA will be the $x \tan \theta dx$, $x \tan \theta dx$.

If you take a $\tan \theta$ common out of that, that means this is what is showing that along this waterline, the dA area the x^2 one that what the moment of inertia along the axis passing through the symmetrical axis that what into the $\tan \theta$. So this is what is established a relationship between \bar{x} the volume of liquid inertia passing through the O point and then $\tan \theta$, θ is a angle of tilting.

So if it is that from the simple geometry you can find that $MB \text{ dash} = x \text{ bar} \cdot \tan \theta$ okay. If you have a look at these triangles, we can find out that this is what by this definition I naught by v submerged the MB will be the MG plus GB . The finally the MG will be this component minus GB . So any object we can find out the center of gravity.

You can find out the center of buoyancy. That what can be computed. We can find the v submerged. We can get it I naught then you can compute the MG . If MG is positive then it is a stable equilibrium, okay. If MG equal to zero, then we can say it is a natural equilibrium, okay. If MG is negative, then we call unstable equilibrium conditions. So with this, we compute it that what will be the MG of a floating object.

(Refer Slide Time: 36:07)


Stability

Floating instability occurs in nature.

Fish generally swim with their planes of symmetry vertical. After death, this position is unstable they float with their flat sides up.

Giant icebergs may overturn after becoming unstable when their shapes change due to underwater melting. Iceberg overturning is a dramatic, rarely seen event.

For example, Sinking of Titanic Ship



Sinking of Titanic Ship (1912)

- Titanic struck with submerged iceberg in 1912

Just let me see this just want to say that what are the applications of the floating, stability of the floating objects okay. And if you look at that if you if we can see observe of a dead fish you can see that it is what tilted in when a fish is dead conditions. So finally you see that it is floating as a side unstable, with flat sides up.

This because of the change of the center of buoyancy and when the fish is swimming the symmetry is different and once it is dead that what it changes. It cannot be stability position of that. And many of the interesting photographs or the video you can see it that the melting of icebergs or falling of the icebergs, okay. Very beautiful, scenic beauty has come it.

But when these icebergs are falling it we do not know it what it happens the in underground of this big icebergs, giant icebergs. For examples because of the heating system of the oceans there could be underwater melting. So at the surface could be iceberg is standing it but below because of the heating systems of the undercurrent the heating systems of oceans there could be a melting which is going down below of a iceberg.

As this melting it you see that at certain points it will come it. Its center of buoyancy will change it and the point of MG what we have discussing is that, that becomes a negative and it can immediately collapsed it. So that what this very there is sudden collapse of a big iceberg is happens it which because of the presence of the underwater melting of the system.

If I take a simple the specific gravity of the ice and the specific gravity of sea water, any iceberg if you look it that, the one eighth percent of the iceberg will be floating condition on the surface. The seven by eight percent will be the inside the sea. So only what you see this one by eight percent of the iceberg what we see it. The seven by eight percent of the iceberg inside cannot see that and we do not know what could be the shape of that iceberg okay.

So that is the reasons if you know it if you can see the great movie of Titanic, which is stuck in because of stuck with the iceberg in 1912 because of not under estimating, not knowing having the knowledge of the iceberg. That is what the point is because we look it from the top that iceberg of one by eight but seven by eight percent of iceberg is within the waters.


So 1912 you can know it there was not much technology to do at present what we have like the space technology, the GPS technology, the radar technology, we can do details sounding what type of the iceberg is there. What is the extent of the icebergs. We have a satellite motion to monitor the iceberg but that is what was not there. The even if you look at the Titanic movie, which is one of the largest ship in that periods.

It was very expensive interior decorations, but they did not understand the technologies necessary for to make a safety of the big Titanic ship. That is what it happened. So that is what the tragedy is committed. So what my point is to say that so, as a engineer who may built a big interior design, expensive ship but also you should look it the safety of the ship.

Or other way round, you should always should have a knowledge of the fluid mechanics, which gives us a lot of the safeties like when you are constructing a big towers, big high rise, high rise buildings, the safety is more important as compared to have a big interior or very expensive interior designs, okay. With this what I have to say that the stability of floating objects what is we are talking about it has lot of examples of the stability of the floating objects.

Natural you can see it and that is what realize the navigation systems in the oceans. It has now brought its new technology, new way to do this safer navigation as compared to the 1912 but that what is a lesson learnt for a engineers that instead of looking the making a bigger ship the best the beautiful interior, but the safety is the first. That is what my point to tell you, okay.

(Refer Slide Time: 41:52)

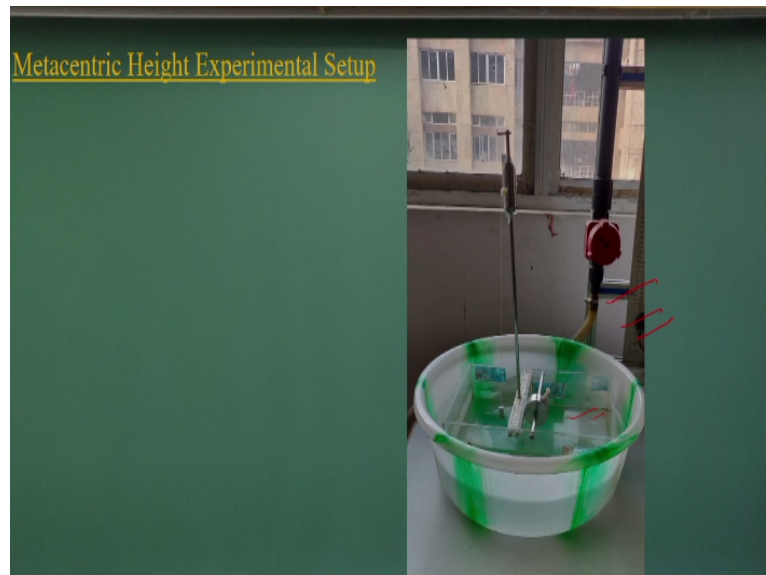

So let us look at simple experiment, metacentric height experimental setups with just balancing the weight we can measure the metacentric height of a floating object like this and this type of facilities are there any fluid mechanics lab, you can just measure the metacentric height and find out the stability of floating object.

(Refer Slide Time: 42:16)

Pressure Distribution in Rigid-Body Motion

- In rigid-body motion, all particles are in combined translation and rotation, and there is no relative motion between particles.
- With no relative motion, there are no strains or strain rates, so that the viscous force vanishes from total force acting on the static fluid control volume (element) equation, and leaving a balance between pressure, gravity, and particle acceleration

$\nabla p = \rho(g - a)$

- The pressure gradient acts in the direction $(g - a)$, and lines of constant pressure are perpendicular to this direction.

Fluid at Rest

Now let us come it to the another component on fluid statics that means fluid at the rest. But we are looking it a rigid body motions. That means what it happens that if I have a half filled liquid containers. That means I have a half filled liquid containers. It has a free surface and this is the containers. If I accelerate it with acceleration a . Okay, I have a tank and I am just accelerating with acceleration a .

So we can imagine it what will happen, the fluid will slush it. That means fluid will be having a slushing, it is up and down effects. But after certain times what will come it that will be new free surface will be created, slushing will stop it. New free surface will come it and that what will move it that acceleration a . So when it comes to a stage there is no slushing, the new free surface is created.

And the fluid now behave as if a rigid body. That means there is no velocity gradient. No shear strain rate. No shear stress formations. So it acts like a rigid body motions. It acts like a rigid body motions moving with acceleration a . So it is a very simplified case that if you have a container you have a tank containing the liquid, which is a half filled and it is moving with a constant acceleration.

After certain times you can see that it will make a different free surface. It will change, the liquid will have a different the free surface and after that there will be no change of the velocity gradients and no shear strain formation or the shear stress

formation. So because of that the problem is now it is quite simplified and it becomes a just as if a rigid body motions.

That means, the liquid is there but we can consider because there is no shear stress, only this have. That means what are the force components are there? The force components are one is force due to the pressure, gravity force and force due to this acceleration component. So this we have the three force components now, okay. There is no shear stress. So there is no viscous components are there.

So only we have the three force component. As I derived earlier that we have ∇P is equal to $\rho \mathbf{g}$, \mathbf{g} is the vector; \mathbf{g} is the vector quantity. Now if I have a acceleration this vector quantity, then you can simply consider the control volumes is moving with a accelerations \mathbf{a} , you find out the relative acceleration to equate with the pressure gradient.

So this is the vector equations defining for a control volumes which is moving with constant accelerations of \mathbf{a} and we are equating with pressure, gravity, and particle acceleration or the control volume accelerations what we have. Now if you look at this interesting equations, which is the simplified equations what we got it for this the liquid containers that you can see that the change of the pressure gradient and \mathbf{g} minus \mathbf{a} are the pressure gradient acts in the direction of \mathbf{g} minus \mathbf{a} .

So that means the line of constant pressure are perpendicular to the this direction. So if you know this acceleration due to gravity vectors, you know the acceleration vectors, the vectorically difference between these two that directions will give us the line of constant pressure will be the perpendicular to that direction. That means, the free surface will tilt at it, the pressure diagrams will change which will be perpendicular to that.

Now if you look it if I draw the vectorically the components that this the object is moving like having the acceleration \mathbf{a} . Moving as a acceleration \mathbf{a} is a vectorical component, it can have the scalar component in three x, y, z coordinate systems. So if I just balancing this part as the vectorical additions if I do it and because of that you

can see the constant pressure diagrams will have a tilting with a theta which is balancing with the force component.

Tan theta will be balancing the force component because of a_x the acceleration, the scalar quantity in x direction, the acceleration z directions component of the scalar quantity and g is the tan theta just the vectorically in this part, that part will be the tan theta of this. So what it indicates now, the surface will be tilted with a theta degree and will make a constant pressure diagram.

That means, if you have the free surface that means the free surface will be tilted with a theta degree such a way that these two force component will counterbalance by the force due to the pressure gradient. That is the very vectorically we are computing it. So the pressure will be changed like this. So your free surface atmospheric pressure lines also can draw it as I given the examples like this will have the tilting surface as we have a acceleration of this.

And that tilted surface the angle it depends upon the acceleration component in x directions and the z direction and g value to find out what will be the theta component. That way, we can vectorically solve these problems.

(Refer Slide Time: 49:02)

Uniform Linear Acceleration

- The surfaces of constant pressure must be perpendicular to direction of pressure gradient and are thus tilted at a downward angle θ such that

$$\theta = \tan^{-1} \left(\frac{a_x}{g + a_z} \right)$$

- One of these tilted lines is the free surface, which is found by the requirement that the fluid retain its volume unless it spills out.
- The rate of increase of pressure in the direction of pressure gradient is greater than in ordinary hydrostatics and given by

$$\frac{dp}{ds} = \rho G \quad \text{where} \quad G = \sqrt{a_x^2 + (g + a_z)^2}$$

The diagram shows a 3D coordinate system with x and z axes. A fluid is contained in a vessel. The free surface is a tilted line. The angle of tilt is $\theta = \tan^{-1} \left(\frac{a_x}{g + a_z} \right)$. The pressure gradient vector ∇p is shown perpendicular to the surface. The effective gravity vector G is shown pointing downwards and slightly to the right. The diagram is labeled "Fluid at Rest".

And that is what is the explanations that the surface of the constant pressure must be perpendicular to the pressure of gravity and it will be tilted downward such a way that theta is this part x a z okay, it will be z here. So tan theta will be same diagrams. So if

you have it the free surface also will be tilted as I explained it the free surface also constant pressure diagrams free surface will be the tilted on that way to get it.

But if you do not have the enough the wall length the sorry the wall height, sometimes liquid can spill away from this because of like for example, you have the containers and moving with a particular acceleration. Again you increase the accelerations further and further okay, it will come it a such a stage that it may overflow from the liquid from the tank, open tank if you have.

If you have a pressurized conditions, you can solve it a problem like that when I will solve the numerical problems. So the basically what you can try to know it that as we move with a constant acceleration, the free surface changes, the pressure diagram changes it and that what equate with two force component, one is particle acceleration component and other is the gravity force component.

With a simple hydrostatic equations we can write it. And similar way the rate of increasing the pressure in the directions of pressure gradient will be the greater than the ordinary pressure statics, which is definitely true now, which will be the dp by ds the ρG is the resultant component of a x and a g vector component what we will do it which will be the perpendicular to this will be the ρG you can compute it what will be the conditions.

(Refer Slide Time: 51:06)

Rigid-Body Rotation

- Rotation of the fluid about z axis without any translation.
- Assumes that container has been rotating long enough at constant Ω for the fluid to have attained rigid-body rotation. The fluid acceleration will then be a centripetal term.
- The angular velocity and position vectors are given by

$$\Omega = \Omega \mathbf{k} \quad \mathbf{r}_0 = r \mathbf{i}_r$$
- Then the acceleration is given by

$$\Omega \times (\Omega \times \mathbf{r}_0) = -r\Omega^2 \mathbf{i}_r$$
- Force balance becomes

$$\nabla p = \mathbf{i}_r \frac{\partial p}{\partial r} + \mathbf{k} \frac{\partial p}{\partial z} = \rho(g - a) = \rho(-g\mathbf{k} + r\Omega^2 \mathbf{i}_r)$$

Now let these conditions consider similar way of rigid body rotations, okay. Now we are talking about the rotations. If you look it any chemical industry, the dairy industry many times we do the mixing of the two liquids. What we do it we actually do the uniform rotations of the liquid contents okay.

So if you do a uniform rotations of liquid containers, so you can understand it that if I have the liquid filled with this ones, and I start the rotating of this ones, so definitely you can after certain times, it will have a shape like this. So when it comes to a constant, the shape, since this is a uniform rotations and we are doing it they will be the same conditions. The velocity gradient will not be there.

No shear strain rate also shear stress. So it is again as if like a rigid body motions. That means a ball is rotating with a uniform rotations. It has a two components. One is the centrifugal forces another is the gravity forces. That what we will equate it. But in this case, we are talking in terms of cylindrical coordinate systems, vectorically we are representing it.

That is the reasons you just look it because this is a quite general problem any type of rotations, we can solve it considering the cylindrical coordinate systems like k and i r the unit vector along the radius will have a r and j and we have a uniform rotations we are doing it and because of that you can understand it the centrifugal accelerations will be this part okay. Here it is representing as a vector notations okay.

What is the position vectors, angular velocity that the centrifugal accelerations what will be come it you can as you know it the minus $\rho \omega^2 i r$. That what will come it? Now this component will be balanced by the pressure gradient component, pressure gradient component ρg minus a ; a we know it the centrifugal acceleration component what we have got it.

And if you put it the proper sign conventions you will get it grade p is $\rho g k$ and the centrifugal acceleration component in the radial unit vector directions the force acting in the negative of, the gravity force is acting the negative of z directions. That what balance with the Δp . So if you look it that, if you have a constant translations

accelerations or uniform rotations, the gradient of P is equal to rho times of the vectorial difference between acceleration due to gravity and the x.

In case of a uniform rotations, we are using the centrifugal acceleration component. That is rho omega square i r. And here we represent in terms of vectors. That is the reasons i r is a unit vector in radial directions and the k is the unit vector in the z direction. As the vector components we have put it then finally we get a equations. This equation need to be solve it to determine what will be the pressure.

(Refer Slide Time: 55:04)

Rigid-Body Rotation

- Equating like components, find the pressure field by solving two first-order partial differential equations

$$\frac{\partial p}{\partial r} = \rho r \Omega^2 \quad \frac{\partial p}{\partial z} = -\gamma$$

$$p = \frac{1}{2} \rho r^2 \Omega^2 + f(z)$$

$$\frac{\partial p}{\partial z} = 0 + f'(z) = -\gamma$$

$$f(z) = -\gamma z + C$$

$$p = \text{const} - \gamma z + \frac{1}{2} \rho r^2 \Omega^2 \quad p = p_0 @ (r, z) = (0, 0) \text{ then } \text{const} = p_0$$

$$p = p_0 - \gamma z + \frac{1}{2} \rho r^2 \Omega^2 \quad z = \frac{p_0 - p_1}{\gamma} + \frac{r^2 \Omega^2}{2g} = a + br^2$$

pressure is linear in z and parabolic in r

The slide also features two diagrams: the top one shows a parabolic water surface in a rotating container with axes r, z, and k, and the bottom one shows a paraboloid of volume with radius R and height h, with volume formula $V = \frac{\pi R^2 h}{2}$ and $h = \frac{\Omega^2 R^2}{2g}$.

Now let us show it the solving this part. We can solve this one pressure field considering two equations, component wise. Okay one is a z component another is i r component. So you can integrate this separately and substitute the boundary conditions to get what will be general equation form. So first integrations will come it this with a constant of integration will be absent.

The second integrations will come it this which is partial differential equation in z direction. P is a function of z and the r. So finally, if you use this two terms with additional constant the pressure will follow like this, okay. Then you substitute the boundary conditions. That you give it, you are arranging in such a way that the pressure let be p naught at that location.

The origins of your coordinate axis where you will have a pressure is p naught then this constant becomes a p naught okay. Then you will have a the pressure equations

like this or if you just rearrange it you will get this part which will be a parabolic equation format. That means, as we already discussed is that when you rotate uniformly the your free surface will follow a parabolic shape.

It will follow a parabolic shape. As the free surface follow the parabolic that all my the pressure diagrams also will follow the similar way p 2, p 3, p 4 will follow that. For a simplified case because this is very general case, if you take a cylinder which is very simplified case, okay its radius are having a uniform radius that then you can find out this parabolic shapes.

And from the basic concept of parabola you can find out the volume, you can find out that the half of water will be displayed from the surface the initially conditions to the top and you can find what will be the height. Which is very easy because in case of cylindrical with a radius r we can simplify these general problems and you can get it a direct equations to compute these ones.

But the real life problems when you have let you have oil tank in a rocket which moves with the rotations component will be the vectorical component not a cylinders are rotating in a like a chemical or a dairy industry where everything is fixed. So it can be rotating only we can consider a simple cylindrical case and solve the problems.


But real life problems like there is the fuel tank in a rocket and the rocket is moving with different acceleration field at different field, what would be the fuel tank pressure diagrams and what would be the conditions of the fuel tank when the pressure what will be exerted because of these.

Those need to be studied that is the reason look it in a vectorical form to solve these problems, where we just have to have remember it, the gradient of pressure is equal to the density times of the vectorical difference between acceleration due to gravity and the centrifugal acceleration component because of uniform rotations.

Then you solve this problems which can be done it for any shape of container as compared to the simplified case like cylindrical containers rotating with a its center of axis which is a very simplified case that can be also used for as I said that where we

know the rotations, we know the cylinders and we rotate with a uniform rotations for mixing up the liquids that can be used a simple formulas but in case of real life problems, the rocket fuel tank in rocket we have to look it vectorical form.

(Refer Slide Time: 59:44)

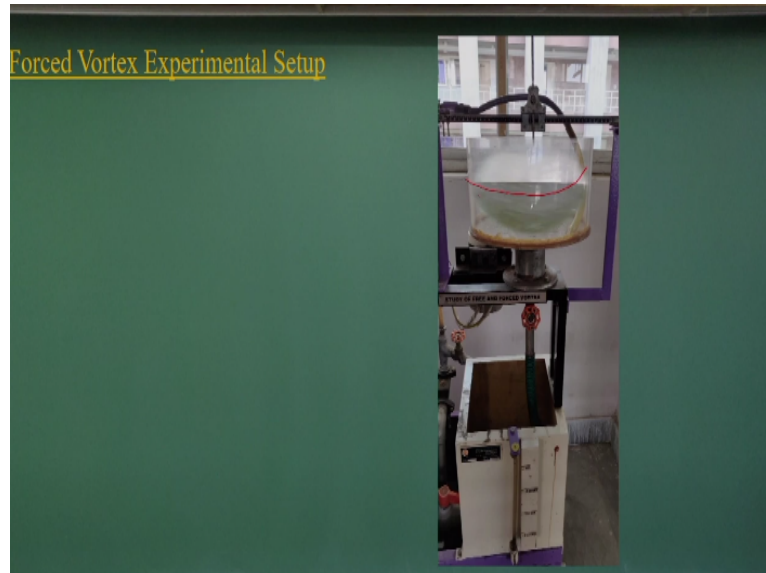

Or you can see this type of forced vortex experimental setups which will be having a motor arrangement to make a uniform rotations. Then to measure the shape of the free surface with a gauging systems. With different rotations you can have a different free surface and you can compare with the theoretical value whether what you are getting from experimental do they match each other.

If not, then you find out why it is not. Definitely if you can understand it, what you will get a theoretical case like having a uniform rotations, the free surface what you get it for a cylinder case that may not come it in experimentally because in case of the experimental we have lot of uncertainty in the measurement the making uniform rotations perfectly. That also not possible.

So you try to understand it there will be a difference between the experiments as well as the theoretical consider. Because that what does not have a any uncertainty in a measurement in any uncertainty in the experimental system that what is considered as a uniform rotations theoretically it is possible then what it happens it. But that the condition to do in an experiment, it is not that easy.

That is the reason there will be a difference between a experimental profile and the theoretical profile.

(Refer Slide Time: 1:01:20)

The slide is titled "Summary of the Lecture" in blue text at the top. Below the title is a list of four main topics:

1. Concept of Buoyancy and Archimedes Principle
2. Concept of Metacentric Height
3. Stability of floating bodies
 - Stable body [Metacenter (M) lies above Center of Gravity (G)]
 - Unstable body [M is below is G]
 - Neutral body [M and G coincides]
4. Pressure distribution in Rigid-Body Motion and Concept of Uniform Linear Acceleration and Rigid-Body Rotation

Below the list is a section titled "Definitions:" with a table:

1. Archimedes Principle	A body immersed in a fluid experiences a vertical buoyant force equal to weight of the fluid displaced by the body
-------------------------	--

Now let me summarize today's lecture that we introduced a center of buoyancy concept. We discussed about two or three basic concept of Archimedes which is very simple concept of that. We discussed of the metacentric height. And and also we talked about as you have to remember of metacentric height in terms of metacenters lies below or above or MG is coincides we have a different conditions like stable, unstable or the natural conditions.

And we discussed about the rigid body motions, uniform linear accelerations, rigid body rotations, the pressure diagrams. I can again tell about you Archimedes principle still holds good okay even if we are in 21st century that a body immersed in the fluid experience a vertical buoyant force equal to the weight of the fluid display by the body. This process makes lot of the process from micro level to macro levels.

All this natural process what it happens from micro water vapor to big water global pattern the buoyancy force also acted. So we make with giving a lot of respect to this Archimedes principle, which helps us to understand very complex process with this point force concept as well as the center of buoyancy, metacentric height. Thank you lot.